

FR2521 FR2531 FR2541

DC-5 MBd RedLink® Open Collector Receiver

Data Sheet



DESCRIPTION

The Firecomms DC to 5 MBd RedLink receiver is based on a fully integrated photo-diode with TIA and limiting amplifier with open collector output. Housed in non-conducting plastic RedLink connector housings, the receiver is blue in colour. The housing is compatible with the Versatile Link style fiber plug, and are designed primarily for use with Plastic Optical Fiber (POF). The receiver operates over the industrial temperature range of -40 °C to +85 °C supporting many industrial applications where a reliable command and control response is required in electrically harsh environments. The integrated receiver (photodiode, transimpedance amplifier (TIA) and limiting amplifier in a single IC) has enhanced immunity to EMI and EMC from the local environment making the unit ideal for use in electrically noisy applications. It has a single data output with an integrated 1 kΩ pull-up resistor (R_L) and active pull down compatible with standard 5 V TTL/CMOS electronics. The receiver is typically used over POF in industrial serial bus protocol links.

AVAILABLE OPTIONS

Table 1

ORDERING INFORMATION / PART NUMBERS

Horizontal Open Collector RedLink® 5 MBd Receiver	FR2521
Vertical Open Collector RedLink® 5 MBd Receiver	FR2531
30° Tilted Open Collector RedLink® 5 MBd Receiver	FR2541



FEATURES

- Designed for use with plastic optical fiber (POF)
- Digital links for data transmission from DC to 5 MBd
- Industrial temperature range -40 °C to +85 °C
- RoHS and UL compliant
- Flame retardant (UL 94 V-0) connector housings
- TTL/CMOS compatible output for ease of design
- Low current link: typical 6mA peak supply current
- High noise immunity
- Compatible with Versatile Link cables and connectors

APPLICATIONS

Table 2
APPLICATIONS

Application	Motor Control, Voltage Isolation, Drives, Inverters, Industrial Control, Gaming, Medical Imaging.
Standard	Low-speed serial RS232, RS485, CAN Bus, Modbus
Distance	30 meters Step Index (SI) POF in typical operating conditions 20 meters in worst case conditions [1]

Note: 1. Depending on the installation conditions.

SPECIFICATIONS

**Table 3
RECEIVER PIN DESCRIPTION**

Pin	Name	Symbol
1	Receiver Output	V_o
2	Receiver Ground	Gnd
3	Receiver Vcc	Vcc
4	Open Collector R_L	R_L
5	Retaining Pin	Gnd
8	Retaining Pin	Gnd

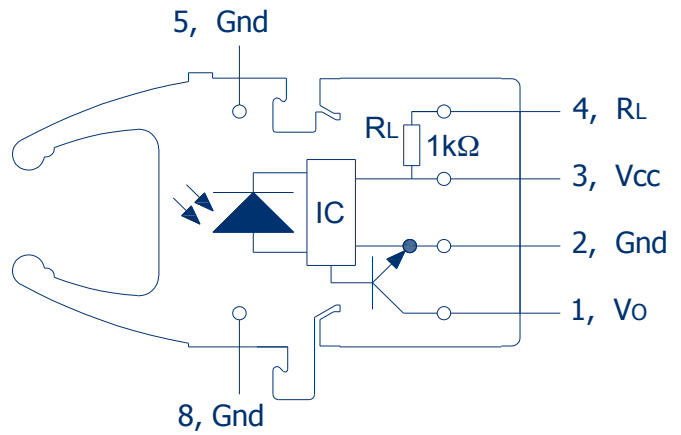


FIGURE 1.
Receiver pin-out with Open-Collector, top view

**Table 4
REGULATORY COMPLIANCE**

Parameter	Symbol	Standard	Level
Electrostatic Discharge, Human Body Model (Contact ESD)	HBM	Mil-STD-883	Level 2 (4 kV)
Radiated Emissions Immunity	Vm^{-1}	IEC 61000-4-3	$15 Vm^{-1}$
UL Certification	UL	94 V-0 material	Files No. Pending
Storage Compliance	MSL	J-STD-020E	2a (4-week floor life)
Restriction of Hazardous Substances Directive	RoHS	Directive 2011/65/EU	Certified compliant

RECOMMENDED APPLICATION CIRCUIT

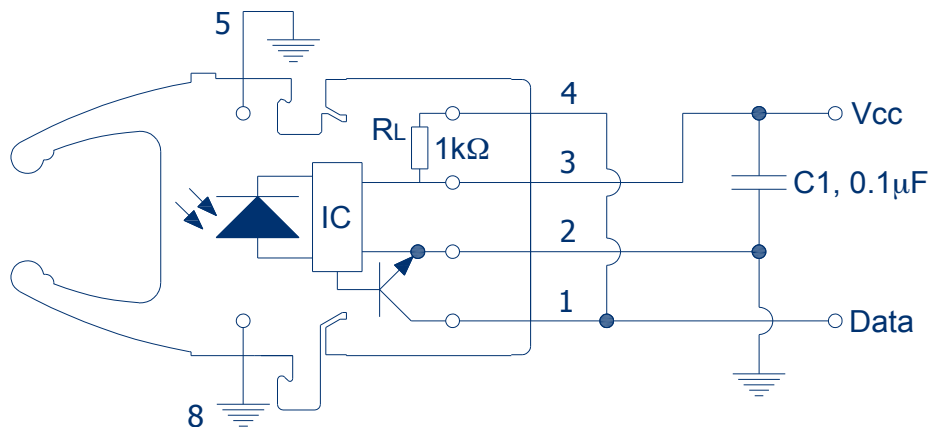


FIGURE 2.
RedLink[®] Open Collector Receiver recommended application circuit.

SPECIFICATIONS

Table 5
ABSOLUTE MAXIMUM RATINGS

These are the absolute maximum ratings at or beyond which the FOT can be expected to be damaged

Notes:

1. 260 °C for 10 seconds, one time only, at least 2.2 mm away from lead root.

Parameter	Symbol	Minimum	Maximum	Unit
Storage Temperature	T _{stg}	-40	+85	°C
Operating Temperature	T _{op}	-40	+85	°C
Soldering Temperature ^[1]	T _{slid}		+260 ^[1]	°C
Output Voltage	V _o	-0.5	18	V
RX Output Current	I _o		25	mA

5 MB LINKS(FT05MHNR/FR25X1)

Table 6
System performance -40°C to +85 °C

Parameter	Symbol	Min	Typical	Max	Unit	Test Condition
Data Rate		dc		5	MBd	BER ≤ 10 ⁻⁹ , PRBS7
Link Distance (FC-500-05B)	d	22 28			m m	I _{FDC} = 60 mA I _{FDC} = 60 mA, 25 °C
Propagation Delay	t _{PLH} t _{PHL}		110 65	140 140	ns ns	R _L =560 Ω, C _L =30 pF Fiber length =0.5m -21.6≤PR≤-9.5dBm
Pulse Width Distortion t _{PLH} - t _{PHL}	t _D		40		ns	PR = -15dBm, R _L =560 Ω, C _L =30 pF

Notes:

1. The propagation delay of cable is typically 5ns/m.
2. Propagation delay is measured at PR = -15dBm.

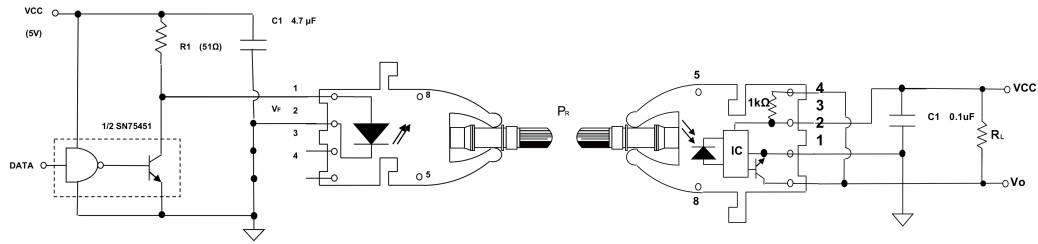


FIGURE 3.
SMB Propagation delay test circuit

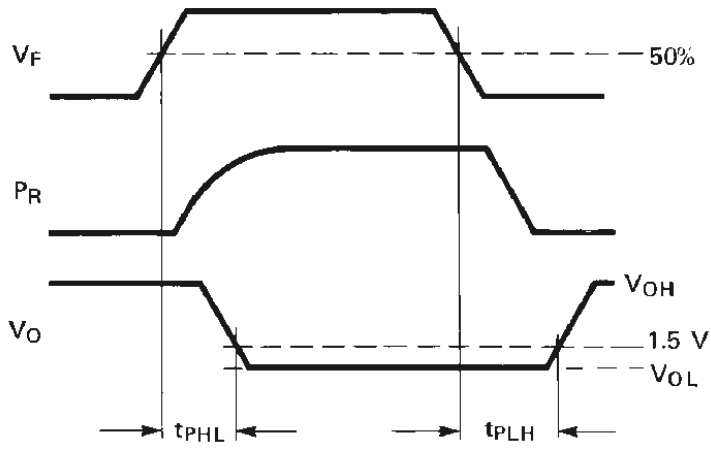


FIGURE 4.
Propagation delay test waveforms

SPECIFICATIONS

Table 7
RECEIVER ELECTRICAL AND OPTICAL CHARACTERISTICS

Test Conditions:

1. Test data was validated over the full temperature range of -40 °C to +85 °C, and over the full voltage range of 4.5V to 5.5V unless otherwise noted. Typical data are at +25 °C with $V_{CC} = 5\text{ V}$.
2. Input power levels are for peak (not average) optical input levels. For 50% duty cycle data, peak optical power is twice the average optical power. Optical power for POF is measured when coupled into 0.5 m of a 1 mm diameter 0.5 NA POF and a large area detector.
3. Pins 5 and 8 are for mounting and retaining purposes. Do not electrically connect these pins.
4. In the recommended receiver circuit, with V_o loaded with 560 Ω and a load Capacitance of 30 pF and an optical signal from the recommended transmitter circuit.
5. Pin 4 may be externally connected to pin 1 for board layout compatibility in existing designs.

Parameter	Symbol	Min	Typical	Max	Unit	Test Condition
Input Optical Power Level for Logic "0"	P_{RL}	-21.6		-9.5	dBm	$V_{OL} = 0.5\text{ V}$, $I_{OL} = 8\text{ mA}$ [2], [4]
Input Optical Power Level for Logic "1"	P_{RH}			-43	dBm	$V_{OL} = 5.25\text{ V}$, $I_{OH} \leq 250\ \mu\text{A}$ [2],[4]
High Level Output Current	I_{OH}		5	250	μA	$V_o = 18\text{ V}$, $P_R = 0$
Low Level Output Voltage	V_{OL}		0.4	0.5	V	$I_{OL} = 8\text{ mA}$, $P_R = P_{RL}$, MIN
High Level Supply Current	I_{CCH}		3.5	6.3	mA	$V_{CC} = 5.25\text{ V}$, $P_R = 0$
Low Level Supply Current	I_{CCL}		6.2	10	mA	$V_{CC} = 5.25\text{ V}$, $P_R = -12.5\text{ dBm}$
Internal Pull-up Resistor	R_L	680	1000	1700	Ω	

MECHANICAL DATA, HORIZONTAL

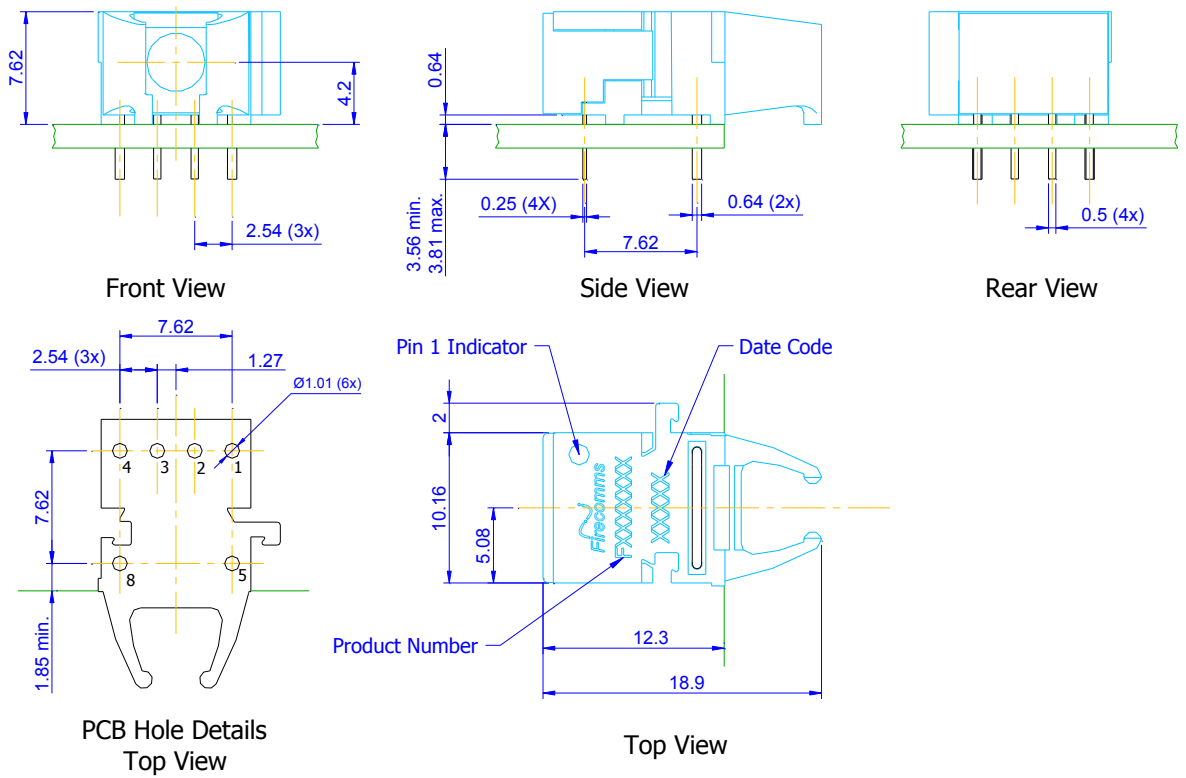


FIGURE 5.
Mechanical dimensions of the horizontal connectors and PCB footprint, which is a top view
General dimensional tolerance is ± 0.2 mm

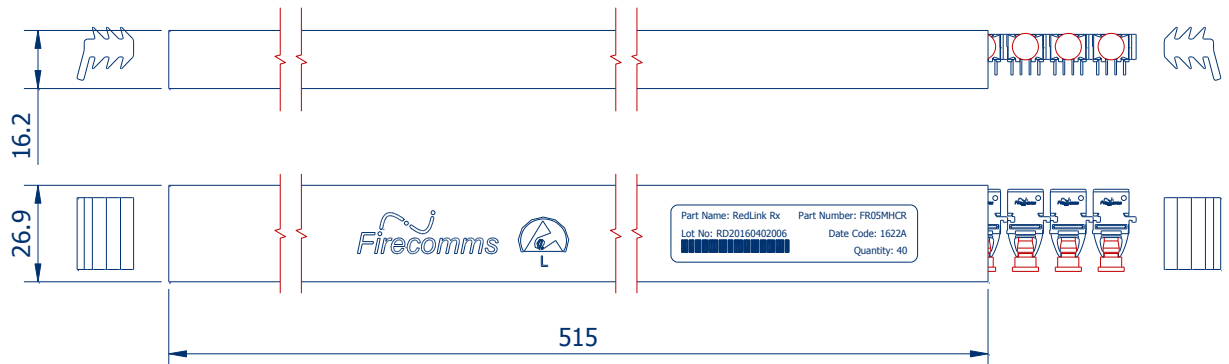


FIGURE 6.
Packing tube for Firecomms Horizontal RedLink[®] Receivers.

MECHANICAL DATA, VERTICAL

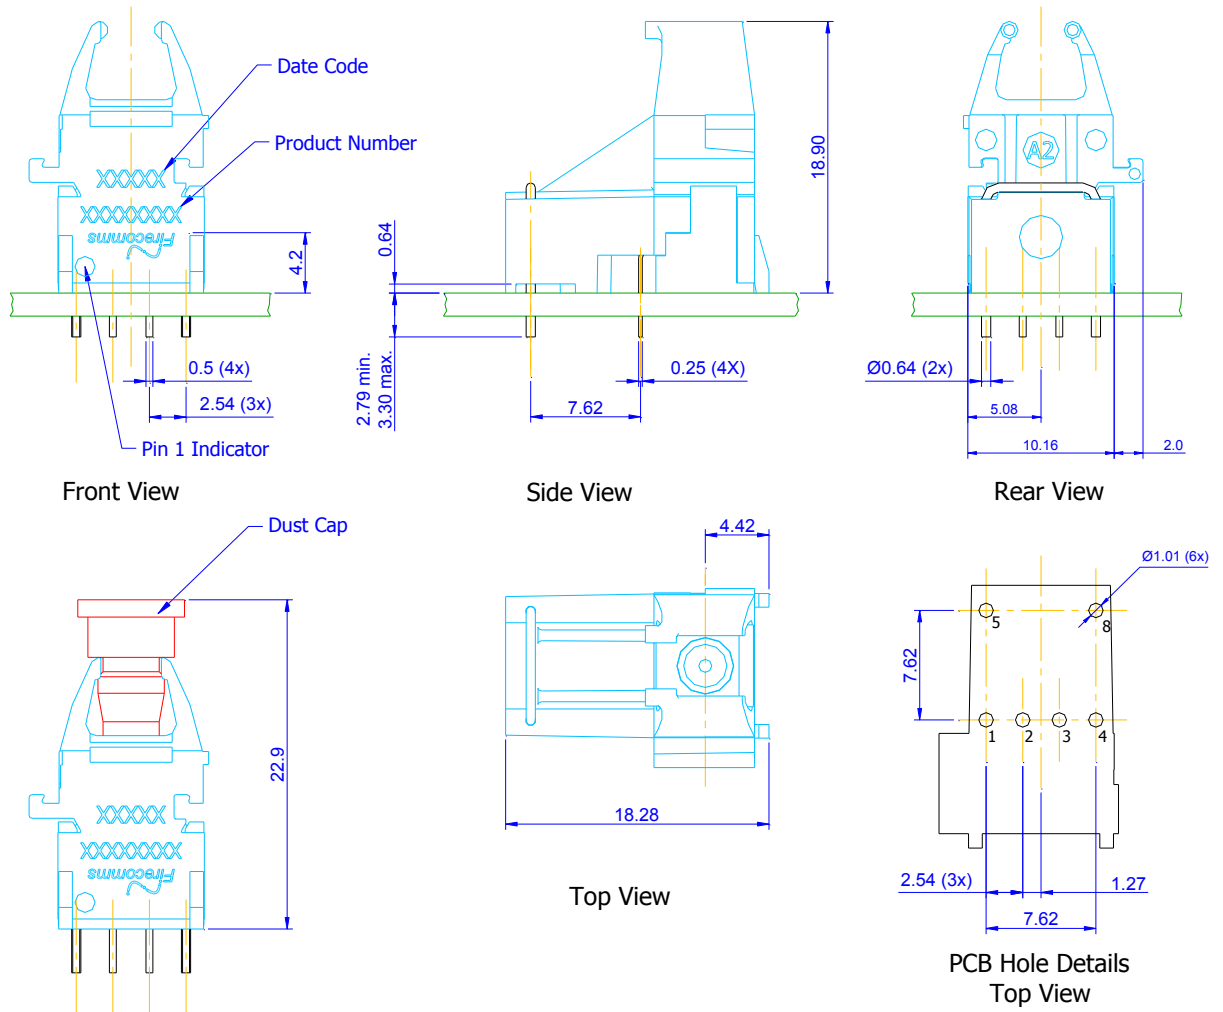


FIGURE 7.
Mechanical dimensions of the vertical receiver connectors and PCB footprint, which is a top view
General dimensional tolerance is ± 0.2 mm

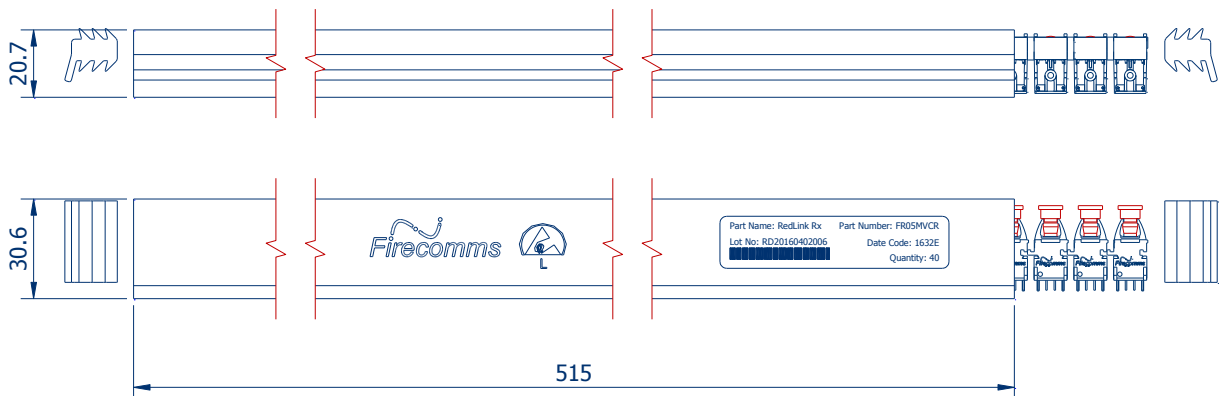


FIGURE 8.
Packing tube for Firecomms Vertical RedLink® Receivers.

MECHANICAL DATA, 30° TILTED

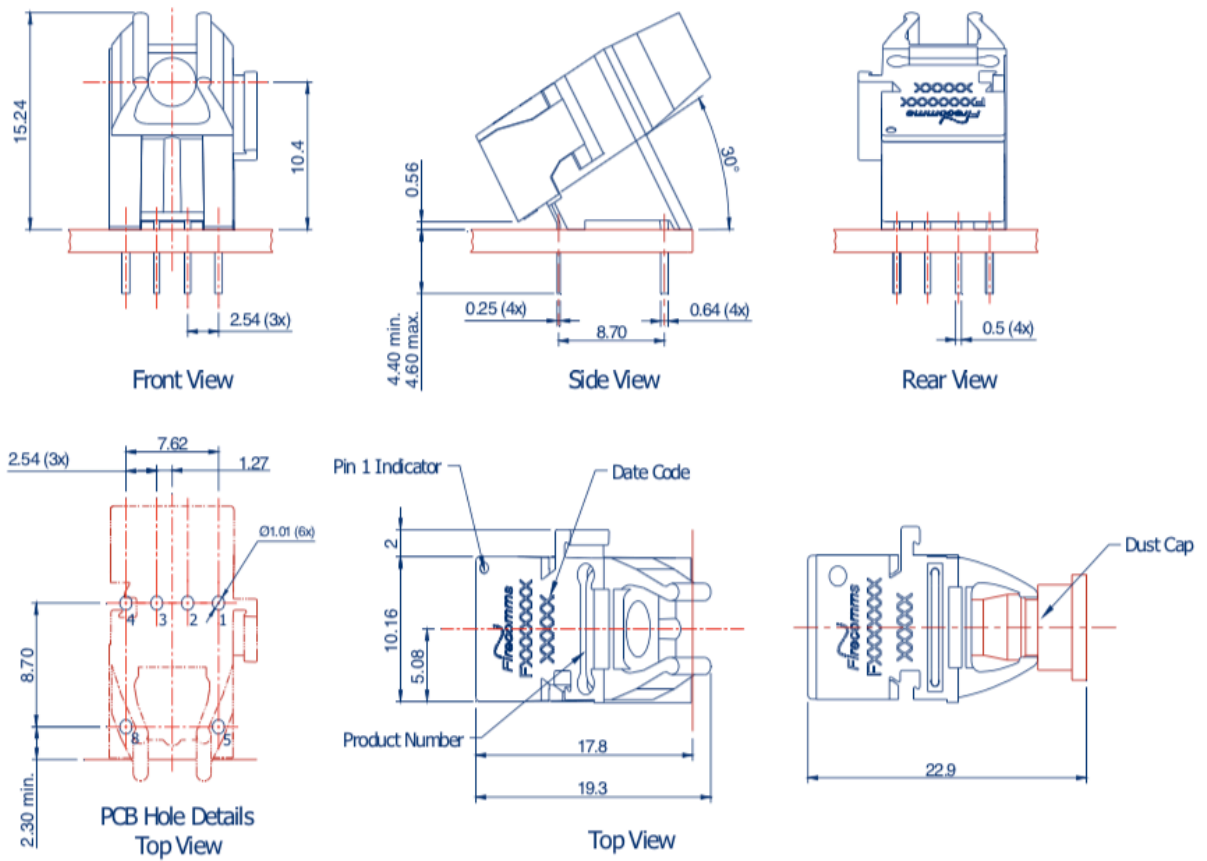


FIGURE 9

Mechanical dimensions of the tilted receiver connectors and PCB footprint, which is a top view
 General dimensional tolerance is +/-0.2 mm



FIGURE 10

Package tube for Firecomms Tilted RedLink Receiver

PART HANDLING

The Firecomms high voltage RedLink[®] receiver devices are color coded blue. They are auto-insertable. They are tested for handling in static-controlled assembly processes (HBM). Cleaning, degreasing and post solder washing should be carried out using standard solutions compatible with both plastics and the environment. For example, recommended solutions for degreasing are alcohols (methyl, isopropyl and isobutyl). Acetone, ethyl acetate, phenol or similar solution based products are not permitted.

In the soldering process, non-halogenated water soluble fluxes are recommended. These parts are not suitable for use in reflow solder processes (infrared/vapor-phase reflow). The dust plug should remain in place during soldering, washing and drying processes to avoid contamination of the active optical area of each component.

The Moisture Sensitivity Level (MSL) classification of this device is 2a according to JEDEC J-STD-020E. The shelf life of an unopened MBB (Moisture Barrier Bag) is 24 months at < 40 °C and < 90 % R.H. Once the Moisture Barrier Bag is opened the devices can be either

- a) Stored in normal factory conditions < 30 °C and < 60 % R.H. for a maximum of 672 hours (4 Weeks) prior to soldering.
- b) Stored at < 10 % R.H. (Dry Cabinet).

PACKING INFORMATION

Components are packed in PVC anti-static tubes in moisture barrier bags. Bags should be opened only in static-controlled locations, and standard procedures should be followed for handling moisture sensitive components.

Table 8
PACKING INFORMATION

	Horizontal	Vertical
Components per Tube	40	40
Tube Length	515 mm	515 mm
Tube Height	16.2 mm	21.0 mm
Tube Depth	26.9 mm	30.8 mm
Tubes per Bag	5	5
Bags per Inner Carton	1	1
Inner Carton Length	630 mm	630 mm
Inner Carton Width	70 mm	70 mm
Inner Carton Height	105 mm	105 mm
Weight per Inner Carton, Complete	0.77 kg	0.92 kg
Components per Inner Carton	200	200
Inner Cartons per Outer Carton	10	10
Outer Carton Length	650 mm	650 mm
Outer Carton Width	235 mm	235 mm
Outer Carton Height	376 mm	376 mm
Weight per Outer Carton, Complete	8.15 kg	9.61 kg
Components per Outer Carton	2,000	2,000

For the most recent revision or further information please visit www.firecomms.com or contact the company directly at the following address, Firecomms Ltd, 2200 Airport Business Park, Cork, IRELAND. Copyright© 2004-2016 Firecomms. All rights reserved. Firecomms refers to Firecomms Limited and/or its subsidiaries. Firecomms assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein.